

STATOIL SUPERWAY 10W-40

Motor Oil (PCMO)

APPLICATIONS

SuperWay 10W-40 is a multigrade oil that is recommended for all cars and light trucks, both turbocharged and non-turbocharged. The oil is suitable for both gasoline and diesel engines.

ADVANTAGES

SuperWay 10W-40 provides easy starting at low temperature, excellent lubrication at all operating temperatures and decreased oil consumption. The oils cleansing effect increases the engine's life.

CHARACTERISTICS

SuperWay 10W-40 is a part synthetic low-friction oil for modern engines, which are characterized by high power output, low oil volumes and extended drain intervals.

SuperWay 10W-40 is based on a blend of base oils with low volatility, high oxidation stability and excellent low temperature characteristics.

The characteristics of the base oils have been further improved by means of carefully selected additives. The result is an oil that contributes to easy starts at low temperatures and provides for low oil consumption and excellent lubrication at all operating temperatures.

SuperWay 10W-40 keeps your engine free from carbon deposits and fouling, which extends the life of the engine.

TYPICAL INSPECTIONS

CHARACTERISTICS	METHODS	UNITS	
SAE-class	-	-	10W-40
Density at 15 °C	ASTM D 4052	kg/m ³	878
Viscosity at 40 °C	ASTM D 445	mm ² /s	91
Viscosity at 100 °C	ASTM D 445	mm ² /s	13,7
CCS at -25 °C	ASTM D 5293	mPa.s	6800
Viscosity Index	ASTM D 2270	-	152
Pour Point	ASTM D 97	°C	-42
Flash Point COC	ASTM D 92	°C	220

TESTS AND APPROVALS

ACEA A3/B3, API SL/CF, MB-Approval 229.1, VW 505.00/501.01

HANDLING AND STORAGE

Avoid skin contact.
Repeated contact with used motor oil may cause severe skin damage.
Dispose of used oils properly.
Safety data sheet available for professional user on request.

The right to change product specifications is reserved.




Statoil Lubricants, 118 88 Stockholm.

Customer service tel 08-429 68 50, fax 08-429 68 51, email: smobest@statoil.com

2009-03-11

Friction Fighters™



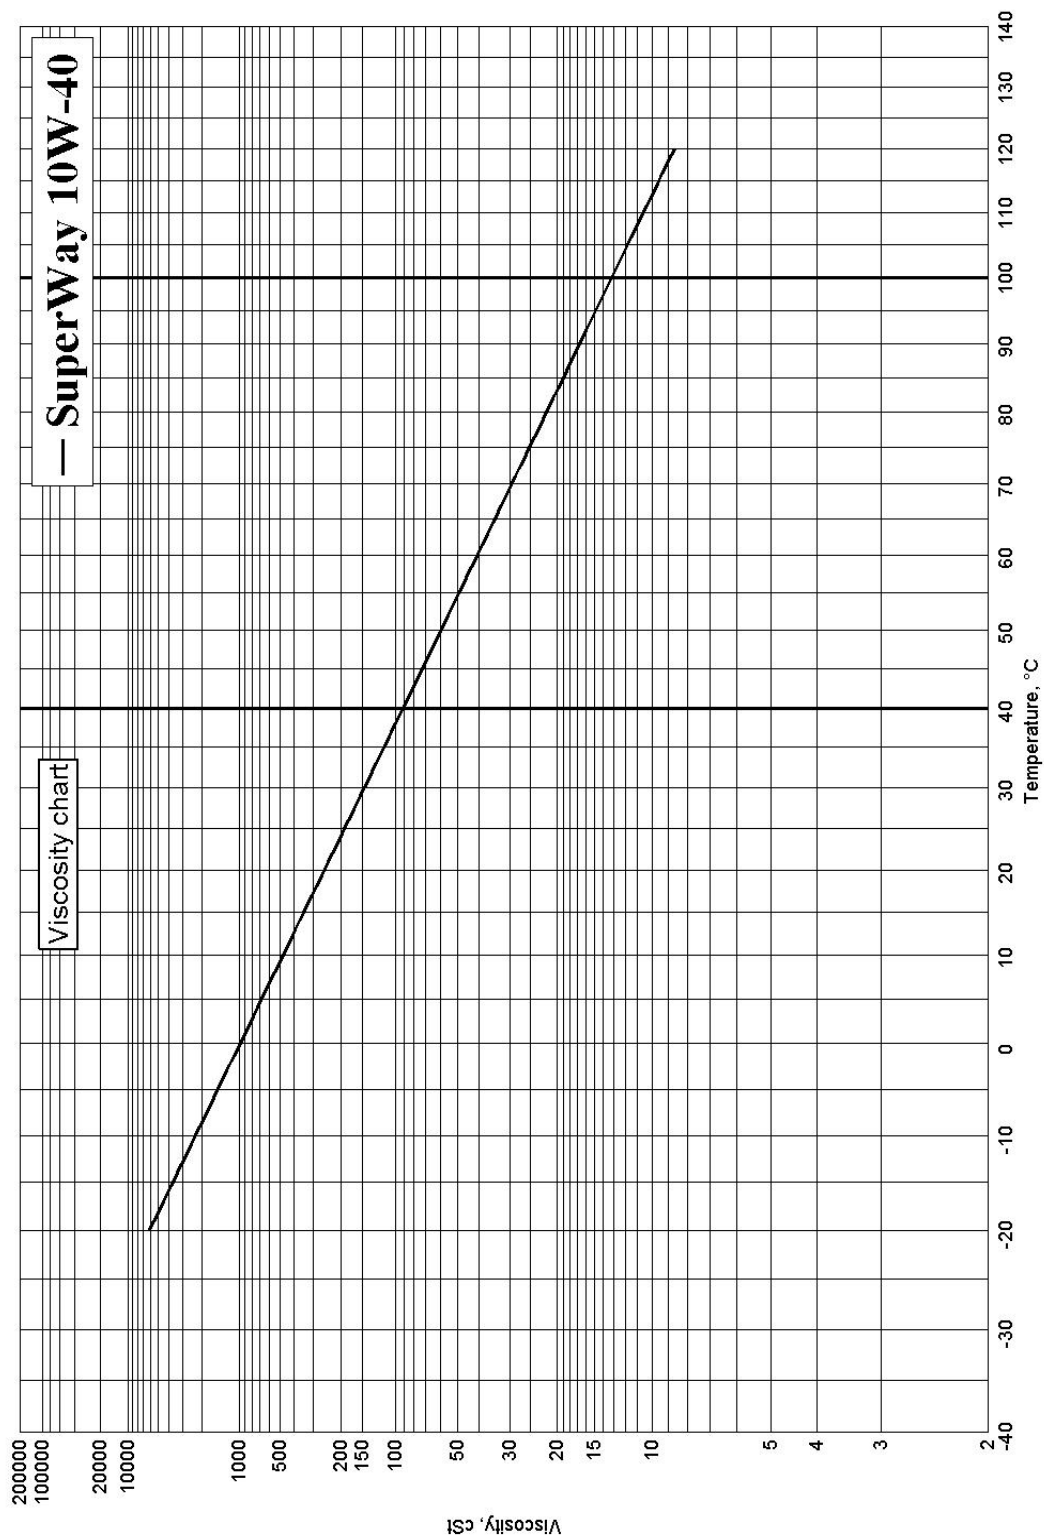

Statoil Lubricants, 118 88 Stockholm.

Customer service tel 08-429 68 50, fax 08-429 68 51, email: smobest@statoil.com

Friction Fighters™

